

Product Description

Modular Lighting System 48V combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required

Product Specification


Luminaire Wattage	4W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	OSRAM3030 6V 1x4W DC150mA
Color Temperature	2700K/3000K/3500K/4000K/5000K
Color Rendering Index	Ra≥90
Beam Angle	120°
Luminous Flux	160lm at 3000K
cut-out	/
Driver	BT-OL28WFD-40X300 (DC150mA)
Power Factor (PF)	/
Input	48V
Output	DC250mA 1X4W
Class	Class III
IP Degree	IP20
Adaptor	48v adaptor
Inner Box	17.5X17X8.5cm
Carton Size	70X37X28cm
QTY/CTN	24PCS/CTN
Net Weight	0.35KG/PCS

Model No.

DC.PF0104-1

CONTACT US FOR MORE DETAILS

[Weblink](#)

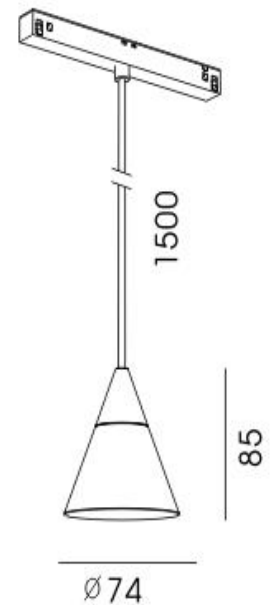

Ø74

Related project

Related project picture of product family:

Product application

