

## Product Description

Kulle's with the appearance of strong and power design, which bring the industrial style of for the application. Innovative thermal design to incorporate pure aluminum body as heatsink and air convection cooling guarantees LED's stable performance and long lifespan. Moreover, the TSU2020-C, with the function of rotating the lamp head to adjust the beam angle freely 15° , 30°and 45°.

## Product Specification


Luminaire Wattage	20W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	LUMINUS CXM-9
Color Temperature	2700K/3000K/4000K/5000K
Color Rendering Index	Ra≥90
Beam Angle	15°-30°-45°
Luminous Flux	1800lm at 3000K
Driver	Tridonic LC20W500MA
Power Factor ( PF )	≥0.90
Input	AC220-240V 50-60Hz
Output	DC500mA 21-40V
Class	Class I
IP Degree	IP20
Inner Box	13X13X13cm
Carton Size	42X42X28cm
QTY/CTN	18PCS/CTN
Net Weight	0.6KG/PCS

Model No.

TSU2020-C

CONTACT US FOR MORE DETAILS

[Weblink](#)

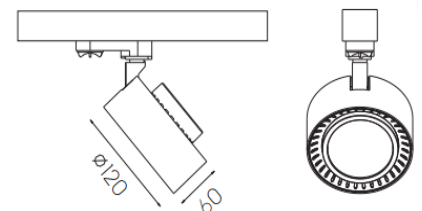

Related references

### Optional Accessories



Honeycomb

Size: ø



Combed Glass

Size: ø



Woven Glass

Size: ø

Related references

### LED POWER SUPPLIES

Constant current power supply

Triac

0-10V

Dali

## Related project picture of product family:

Rotating the lamp head to adjust the beam angle freely 15, 30 and 45

